


☐☐ Mifare Ultralight NFC ☐☐

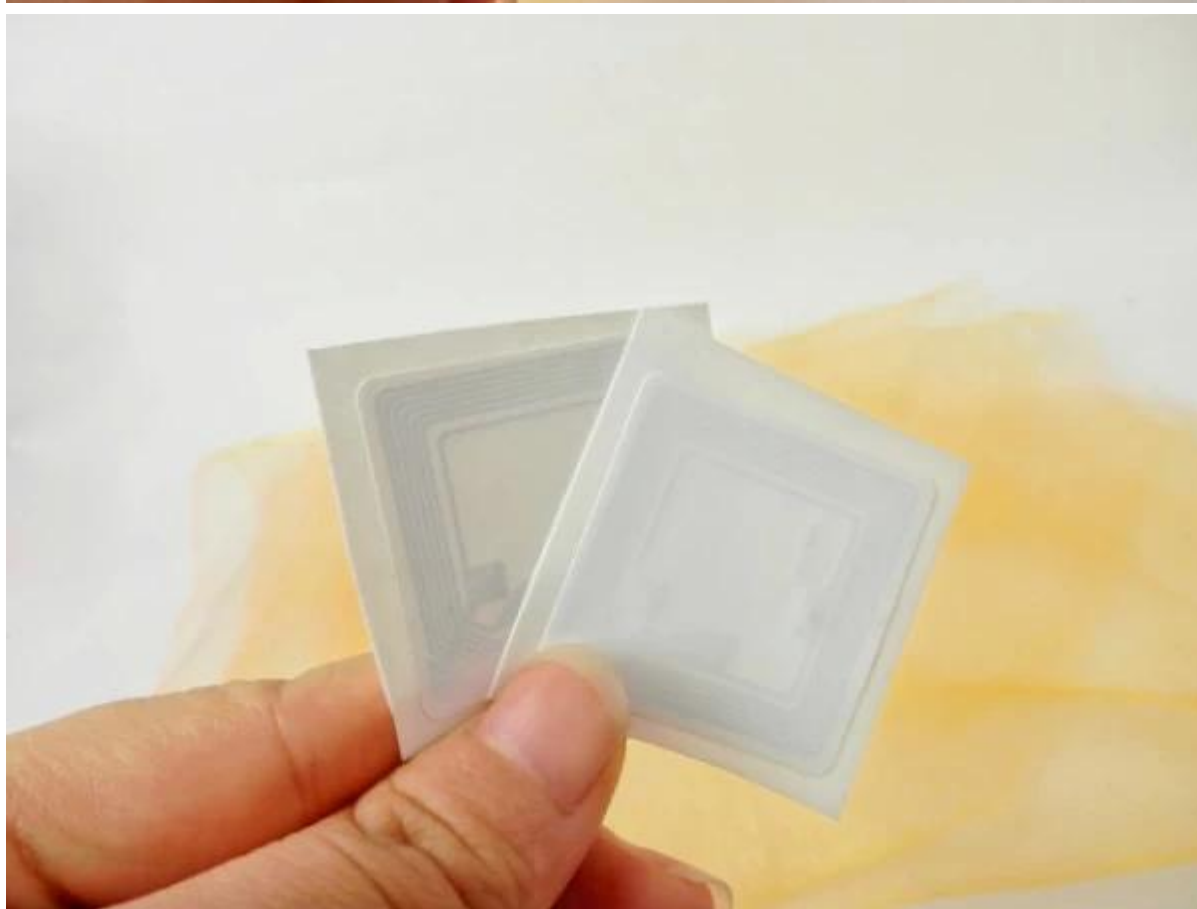

1.☐☐
☐☐☐☐ NXP Mifare Ultralight

□□ ISO 14443A
□□ 13.56 m h z
EPPROM: 64 □□
□□□□ 10 □□
□□□□□□ 106 k □□/□
□□□□ 100000 □

2.□□□□

□□□ PVC/PET/ABS/□
□□□ 15 * 30 □□□25 □□□□□35 * 35 □□□43 * 26 □□□50 * 50 □□□86 * 54 □□□□□□□□□
□□□ 0.2 ~ 0.5 □□

3.□□□□

□□□□□ 5 □
□□□□□:-25 °C ~ 50 °C
□□□□ 20%~ 90 %rh
□□□□□:-40 °C ~ 65 °C

4.□□

□□□□□□□□ □□□□□□□□□

□□

Mifare □□ RFID □□ / Mifare NFC □□ / Mifare S70 rfid □□ / Mifare S50 rfid □□
Mifare □□/Mifare 1 K □□/ Mifare 4k □□
Mifare □□ C/Mifare □□□□/ rfid □□