



ISO 9001 NFC 13.56MHz NTAG215 504 10 IP68 316L 50,000 -

|    |                         |
|----|-------------------------|
| 频率 | 13.56MHz                |
| 芯片 | NTAG213、NTAG215、NTAG216 |
| 接口 | UART、I2C                |
| 功能 | RFID、NFC                |
| 尺寸 | 19.5*15mm               |
| 重量 | 0.5g                    |
| 颜色 | CXJ                     |
| 材料 | CXJ-NFC材料               |
| 寿命 | 10年                     |
| 温度 | -20~70℃                 |
| 湿度 | 10~90%                  |
| 厚度 | 1.5mm                   |
| 颜色 | 白色、黑色                   |
| 接口 | USB、蓝牙                  |
| 功能 | ISO14443A、ISO15693      |
| 尺寸 | 19.5*15mm               |
| 重量 | 0.5g                    |
| 厚度 | 0-2cm                   |

|      |           |
|------|-----------|
| 产品名称 | NTAG213   |
| 规格   | 19.5*15mm |

□□□□

10x6x3 cm

□□□□

0.500□□

□□□□□□□□


1.15□□□□□□□□80□□□□□□□□□□

2.□□□□□□□□□□30□□□□□□

3.□□□□□□CE/FCC/IC□□□□□□□□□□

4.DATA□□□□□□□□□□NDA



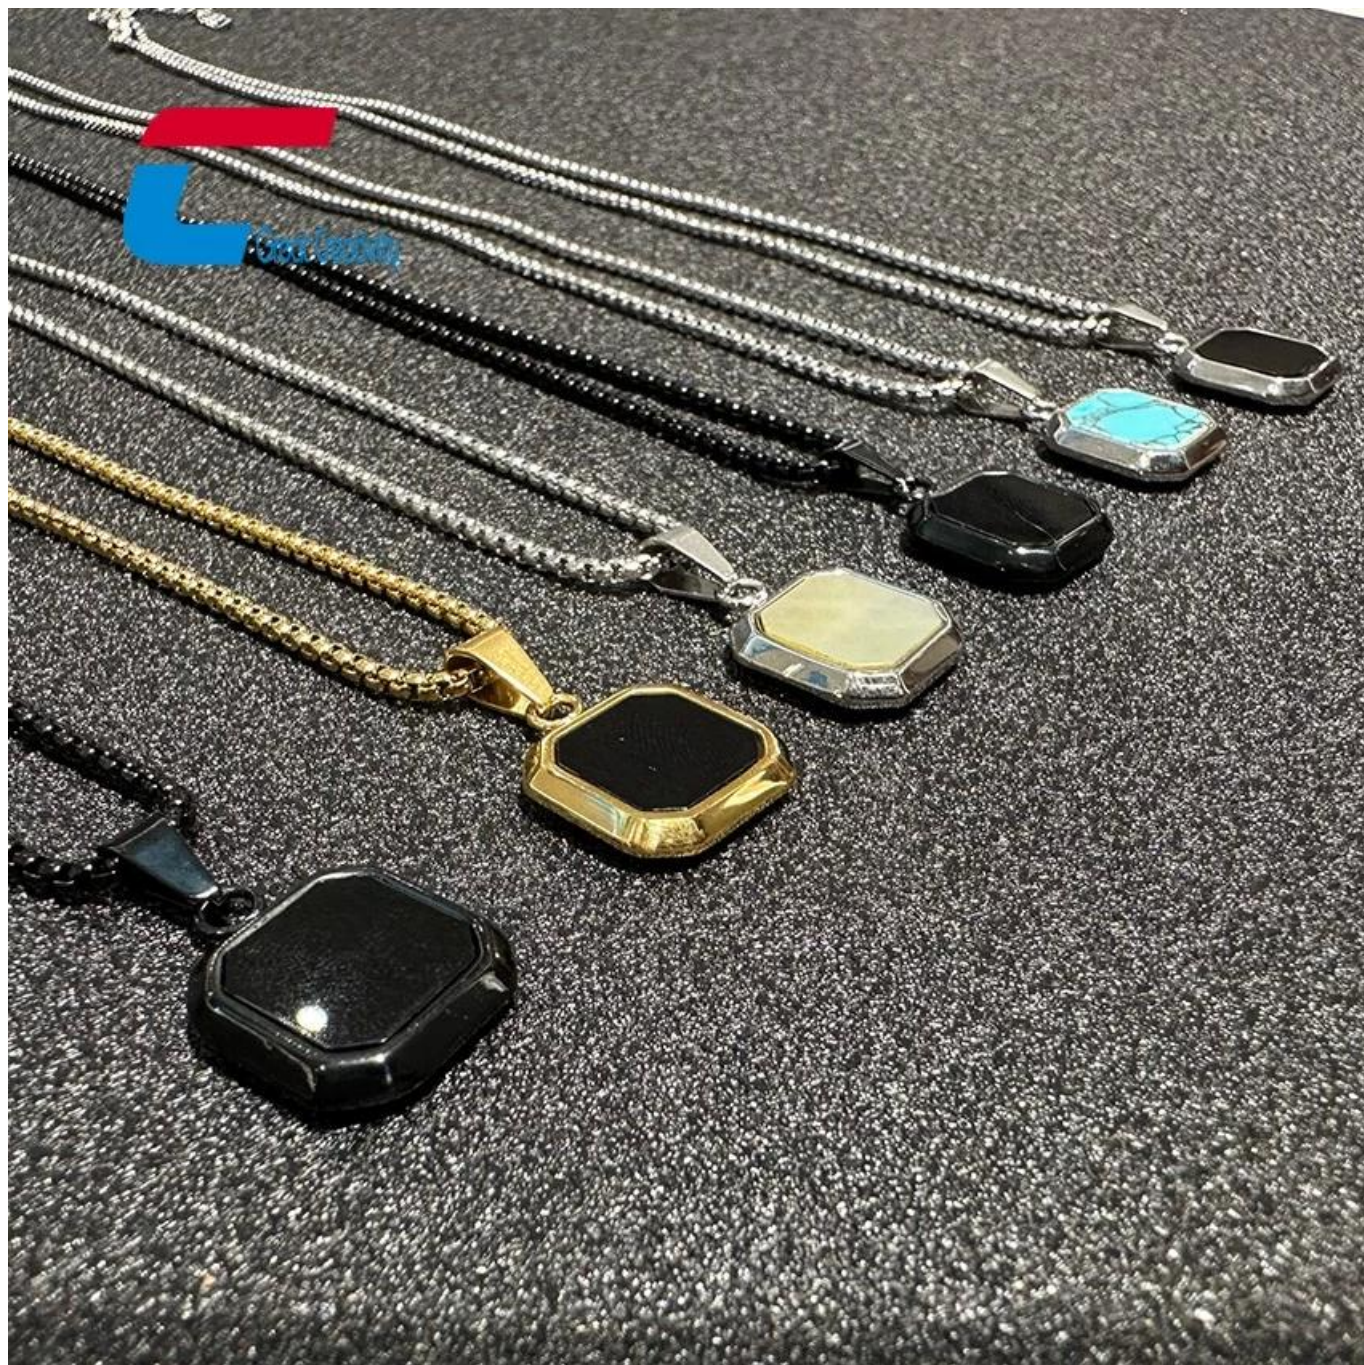







Weight:12.5g



Weight:12.5g



Weight:12.5g



Weight:12.5g



Weight:12.5g



Weight:12.5g



Weight:12.5g



Weight:12.5g



Weight:12.5g



Weight:12.5g

□□□□□□□□□□ **NFC** □□ □□□□□□□□□□ [info@nfctagfactory.com](mailto:info@nfctagfactory.com)