


## Adhesive Mifare Ultralight NFC Tag Label

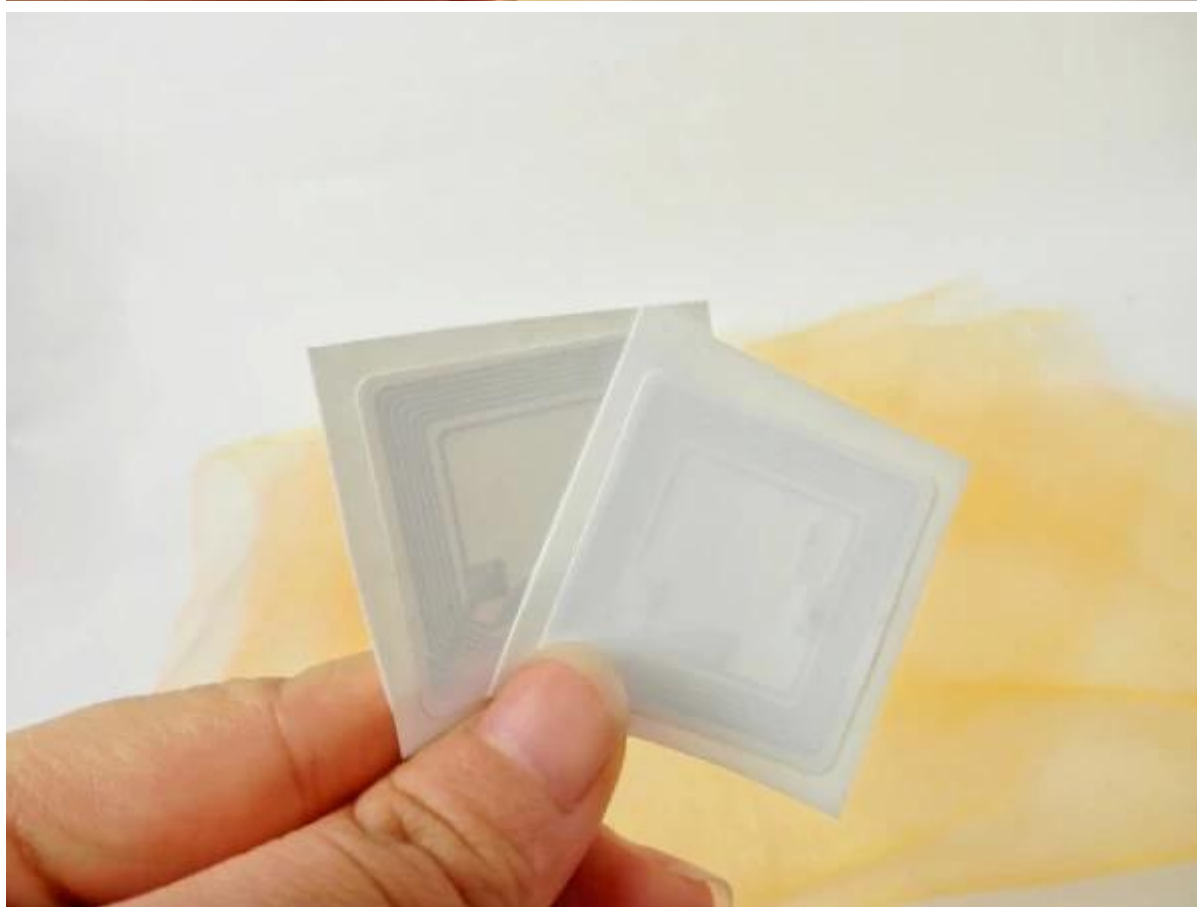

### 1. Specification

Chip Model: NXP Mifare Ultralight

Protocol: ISO 14443A  
Frequency: 13.56 Mhz  
EPPROM: 64 Bytes  
Reading range: up to 10cm  
Data transmission rate: 106 k bit/second  
Write endurance: 100000 times

## **2. Profile**

Surface: PVC/PET/ABS/Paper  
Size: 15\*30mm, 25mm Dia, 35\*35mm, 43\*26mm, 50\*50mm, 86\*54mm, or as request  
Thickness: 0.2~0.5 mm

## **3. Working Environment**

Working life: 5 years  
Store temperature: -25 °C ~50 °C  
Humidity: 20% ~ 90% RH  
Working temperature: -40 °C~ 65 °C

## **4. Craft**

Printing and Laser Logo, Bar code and Serial numbers.

## **Related**

Mifare Ultralight RFID tag/ Mifare NFC tag/ Mifare S70 rfid tag/ Mifare S50 rfid tag  
Mifare tag/Mifare 1K tag/Mifare 4K tag  
Mifare Ultralight C/Mifare ultralight tag/rfid tag