Materiale:	Carta patinata/PVC/PET/PVC duro/resina epossidica
Frequenza:	13,56 MHz
Patata fritta:	Protocollo ISO 14443A NTAG® 213 (144 byte) NTAG® sono marchi registrati di NXP B.V. e sono utilizzati su licenza.
Dimensione:	Diametro 25/30/35/40/50 mm Rettangolare 25*25 mm, 30*30 mm, 35*35 mm, 85,5*54 mm Oppure forma e dimensione personalizzate.
Stampa:	Stampa a colori come design
Caratteristica:	Le etichette con strato anti-metallo ne consentono il funzionamento sul metallo e sul telefono.
Mestieri disponibili:	-Stampa del logo; -Stampa del numero di serie, del codice a barre, del codice QR o del numero UID; -Codifica/Programmabile
Tecnica opzionale:	-Opzione funzione speciale Strato anti-metallo per utilizzo ambientale in metallo; -Stampa di loghi/opere d'arte personalizzate/incisione laser; -Stampa del numero UID Stampa a punti Jet; -URL, testo, numero ecc; -Codifica/blocco per sola lettura. -Foglio di calcolo in Excel
Campioni:	Campioni gratuiti sono disponibili su richiesta

1) Write the corresponding code into the RFID tag and fill in the information. Both parties do not need to download and install APP

2) Touch the middle of the back of the phone or the top of the phone to pop up the homepage, which is convenient for adding friends, adding followers, and sending messages.

Fast Delivery

Read And Write

Anti-Fouling And Moisture-Proof

Information Worry-Free

RFID

Customizable size

It can be customized according
to the format you need

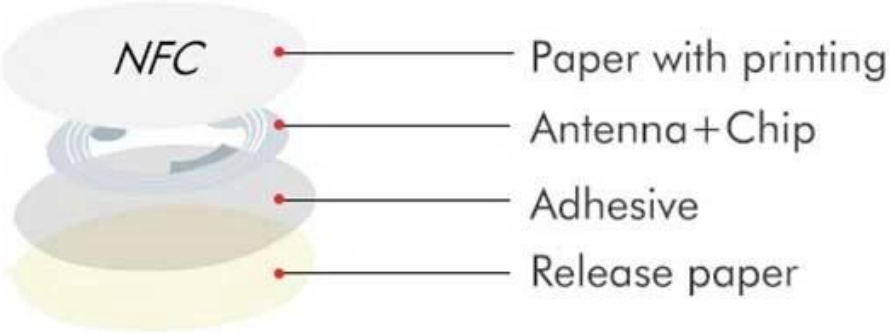

uBump

uBump.