

□□□ 13.56 m h z □□ [nfc](#) □□□□

1□□□. □□

- 1: □ □□: NXP Ntag 213, □□□, topaz512
- 2: □□□: 168 □□□ □ □□□ □□□□ 144 □□□
- 3: □□: NFC □□ 2 □ ISO 14443A □□□□
- 4: □□□: 13.56 m h z
- 5: □□/□□: □□ □□□□ 100000 □
- 6: □□ □□: 106 k □□/s

2□□□. □□ □□

- : PVC/□□ □□/□□
- : 25 mm □□, 35 * 35 m m, 43 * 26 mm, 50 * 50 m m, 86 * 54mm, □□ □□
- : 0.2 ~ 0.5 m m

3. □□ □□ □□

- □□: 5 ~ 10 □ □□ □□□ □□
- □□: -25 °C ~ 50 °C
- 20% ~ 90 %RH
- □□: -40 °C ~ 65 °C

4□□□. □□ □□□□

NFC □□ □□□ □□ □□ □□ □□□ □□□ / □□□ □ /one-touch □□, □□□ nfc □□□ □□ □□, □□ □□, □□ □□, □□.

□□ □□



□□

Packing Details

in piece with oppbag




in piece with oppbag



in roll



in roll

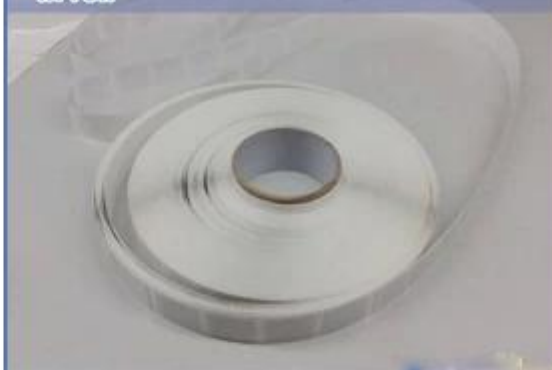

in piece with opp bag
(inside inner box)



outside carton



Product Procedure



Chuangxinjia () rfid 17 RFID/NFC, RFID/NFC, RFID, OPPO, .