


Adhesive Mifare Ultralight NFC Tag Label

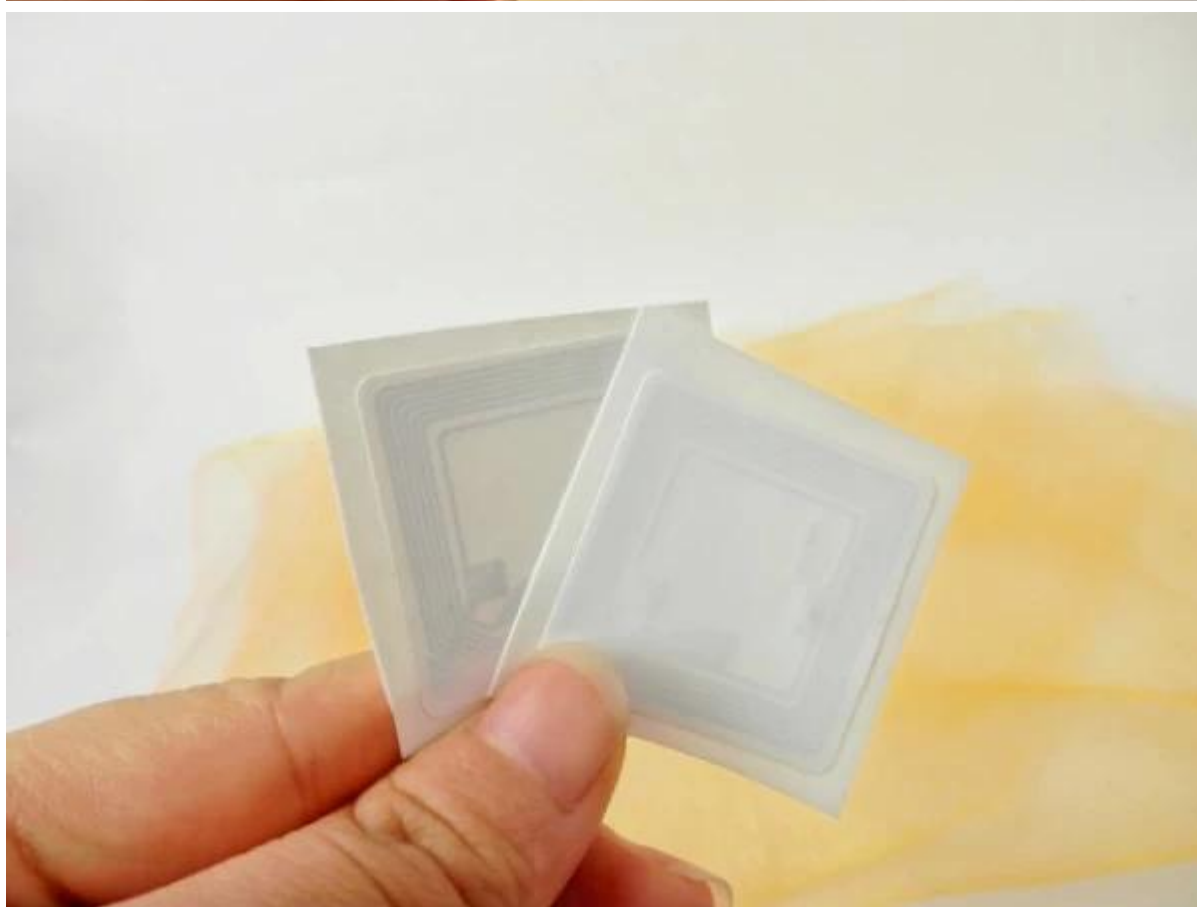

1. Specification

Chip Model: NXP Mifare Ultralight

Protocol: ISO 14443A
Frequency: 13.56 Mhz
EPPROM: 64 Bytes
Reading range: up to 10cm
Data transmission rate: 106 k bit/second
Write endurance: 100000 times

2. Profile

Surface: PVC/PET/ABS/Paper
Size: 15*30mm, 25mm Dia, 35*35mm, 43*26mm, 50*50mm, 86*54mm, or as request
Thickness: 0.2~0.5 mm

3. Working Environment

Working life: 5 years
Store temperature: -25 °C ~50 °C
Humidity: 20% ~ 90% RH
Working temperature: -40 °C~ 65 °C

4. Craft

Printing and Laser Logo, Bar code and Serial numbers.

Related

Mifare Ultralight RFID tag/ Mifare NFC tag/ Mifare S70 rfid tag/ Mifare S50 rfid tag
Mifare tag/Mifare 1K tag/Mifare 4K tag
Mifare Ultralight C/Mifare ultralight tag/rfid tag